
GLASS PANORAMIC ROOF

Component which has a tinted glass panoramic surface to increase the light and visibility in the passenger compartment. Fitted with an electric shutter in several sections to improve temperature and noise related comfort.

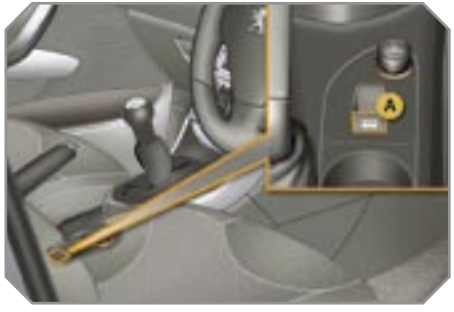

One-touch electric shutter

There are two options for opening and closing:

- manual mode

☞ Pull or press control **A** gently.

The shutter stops when you release the control.



- automatic mode

☞ Pull or press control **A** firmly.

One press opens or closes the shutter completely.

Pressing the control again stops the shutter.

Safety auto-reverse

In automatic mode and at the end of its travel, if the shutter meets an obstacle while closing it stops and moves back slightly.

If the shutter's supply is cut off, the safety auto-reverse must be reinitialised:

☞ press the control until the shutter is fully closed.

If the shutter re-opens during the closing manoeuvre, and immediately after it stops:

☞ pull the control until the shutter is fully open,

☞ press the control until the shutter is fully closed.

The safety auto-reverse function is not operational during these operations.

If the shutter meets an obstacle during operation, you must reverse the movement of the shutter. To do this, press the control concerned.

When the driver operates the shutter control, he must ensure that no one is preventing correct closing of the shutter.

The driver must ensure that passengers use the shutter correctly.

Be aware of children when operating the shutter.